

EXTRA-CAPACITY ECA SPHERICAL ROLLER BEARINGS

A NEW STANDARD IN HIGH PERFORMANCE FOR WIND TURBINE MAIN SHAFTS







A NEW STANDARD FOR MAIN SHAFTS:

GUIDE RING-FREE WITH AN OPTIMIZED PERFORMANCE ENVELOPE

Bearings for wind turbine main shafts operate under immense and continuous dynamic wind loads while rotating at ultra-low speeds, a fraction at which they have been designed to normally run. The kinematic stresses that must be endured as a result of these conditions present staggering challenges to bearings, demanding they perform with requisite durability for extremely long periods between maintenance intervals.

With our new extra-capacity ECA spherical roller bearings, NSK has redefined high performance and reliability specifically for wind turbine main shafts with:

- Newly optimized internal design and an advanced roller-guided cage that eliminates the need for a center guide ring
- Higher load capacities derived from a larger complement of larger-sized rollers
- Superior wear resistance achieved with new design measures, and the optional specification of NSK's long-life Super-TF steel technology



DESIGN FEATURES AND PERFORMANCE CHARACTERISTICS

Boasting newly optimized internal design and advanced cage technology, NSK's new extra-capacity ECA spherical roller bearings deliver unrivaled capacity and reliability to wind turbine main shafts.

DESIGN FEATURES

 Next-generation, roller-guided machined brass cage eliminates the need for a center guide ring and reduces rotational wear

 Optimized internal design packs in more rollers of larger size for a significant increase in load capacity and bearing fatigue life

 Controlled raceway surface finish improves lubrication characteristics and augments wear resistance

- High-temperature dimensional stability up to 200°C
- Optional long-life Super-TF steel for high resistance to wear and flaking damage under severe kinematic stresses
- Optional DLC roller surface treatment for high roller toughness and endurance



LONG-LIFE SUPER-TF STEEL OPTION

During their operating life, wind turbine main shaft bearings must endure immense radial and axial loads while operating at ultra-low speeds. Effective lubrication of rolling contact surfaces is compromised, initiating inordinate stress, wear and potential bearing failure.

NSK's Super-TF (STF) series spherical roller bearings are engineered for outstanding durability in these environments, delivering exponentially longer life when compared to conventional carburized bearings (**Figure 1**).

For main shaft applications this translates to achieving total cost and performance expectations without unexpected downtime and maintenance incidents.

Fig. 1: Life test result under boundary lubrication

1	General carburized steel			
5.5	Super-TF steel			

^{*} ball-rod rolling contact fatigue test



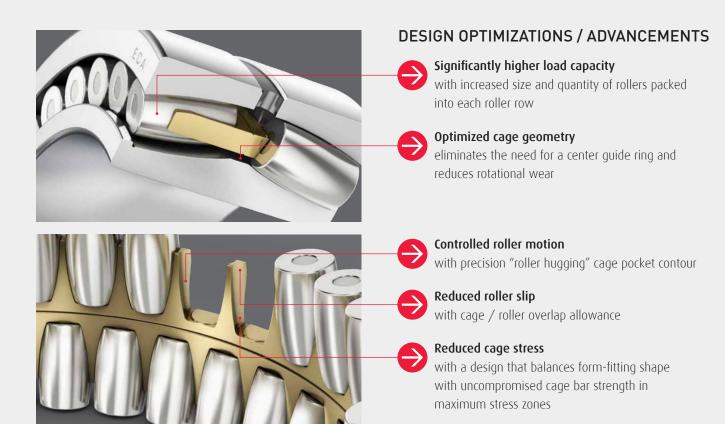


Fig. 2: Super-TF long-life material technology



Material composition

Containing appropriate chrome and molybdenum additives for high material hardness



Special heat treatment

Optimized dispersion of fine carbide and carbonitride particles to achieve high compressive stress



Retained austenite

Alleviating stress concentration on rolling contact surfaces

DESIGNATION SYSTEM

EXTRA-CAPACITY ECA SPHERICAL ROLLER BEARINGS FOR MAIN SHAFT

Special Material Bore Ref. Number		Internal Design		Surface Treatment		Lubrication Features		Surface Finish			
STF	240	/750	Е	CA	g5	S4WC	М	E4	CGXXX	U22B	U303
Dimensio	on Series	Extra Ca	apacity	Carburization		Cage Type		Internal Clearance		Process Control	

DESIGNATION		ATTRIBUTE		
Special material	blank	standard bearing steel		
designation	STF	long-life Super-TF™ steel		
Dimensional series	230	wide series 240 most commonly		
Differisional series	240	used in main shaft applications		
Bore reference number		reference number up to 96: multiply x 5 500 mm and greater are expressed as /500 = 500 mm, etc.		
Extra capacity	Е	optimized cage and rollers		
Internal design	CA	high capacity internal design		
Carburization	g5	complete bearing		
	blank	standard rollers		
Surface treatment	S4WC	diamond-like protective coating applied to roller contact surfaces		
Cage type M		two-piece machined brass cage		

DESIGNATION		ATTRIBUTE		
Lubrication features	E4	lubrication groove and holes in the outer ring		
Internal clearance	CGXXX	custom radial clearance, in microns		
Surface finish specification	U22B	advanced raceway surface finish to promote reduced wear		
Process control specification	U303	special process control for all NSK wind turbine bearings		



NSK **ACCUMULATED** Optimum engagement with our global technology network and design **EXPERTISE** solutions. Intensive project management. Comprehensive engineering support. For main shaft, gearbox and generator applications alike, NSK deploys our accumulated expertise in collaboration with turbine builders and operators to achieve: > advanced design and material technologies for high-capacity, long-life performance > innovative solutions to negate unique phenomena such as white etching cracks (WEC) and electrical erosion › undeterred equipment performance with condition monitoring > control measures and processes - the NSK Wind Standard With NSK as a development partner, our customers embark on a critical path to realizing a high level of performance, predictable reliability and

total cost-efficiency in renewable energy generation.



NSK

NSK AMERICAS

UNITED STATES

NSK Corporation Ann Arbor MI 1.888.446.5675

CANADA

NSK Canada Inc. Brampton ON 1.905.890.9740

MEXICO

NSK Rodamientos Mexicana, S.A. de C.V. Silao Guanajuato MX 52.472.500.9500

BRAZIL

NSK Brasil Ltda. Suzano SP 55.11.4744.2500

ARGENTINA

NSK Argentina SRL Buenos Aires 54.11.4704.5100

LATIN AMERICA

NSK Latin America Inc. Miramar FL 1.305.477.0605

Website: www.nsk.com/am-en NSK Global: www.nsk.com

Every care has been taken to ensure the accuracy of the data contained in this brochure, but no liability can be accepted for any loss or damage suffered through errors or omissions.

Printed in the USA ©NSK 2025. The contents of the publication are the copyright of the publishers.